


**All Purpose Display & Storage Refrigerator**



**Full height Internal LED lighting**

**Dual magnet door sealing and plastic fascia, thermal break**

**Full Length Easy Grip Door Handle**

**Door sensor controlled fan**

**Easy access condenser Filter**

**Easy roll lockable castors**

**Automated and Manual lighting control**

**Self closing toughened safety glass doors, double low E , Argon filled, incorporating the latest warm edge technology**

**Ducted air flow system for even temperature distribution**

**“Shhhh” whisper quiet operation utilising patented EBM Evap and Condenser fan motors adding, efficiency and unparalleled reliability to the new Evolution models.**

**Market recognisable “Orford” look**

**Evolution is an **Easy Clip** fully removable, universal, refrigeration package (one package fits all models).**

**High Energy Efficiency**

Proudly Australian Designed

by The Orford Group

IP protected by AUS DSN no 345317



*With Evolution comes much responsibility. The Orford Group continues to develop World Class Energy reduction systems to improve the lives of our customers and future generations.*

☎ 1300 ORFORD (1300 673 673)  
☎ +617 4641 7372  
✉ [sales@orford.com.au](mailto:sales@orford.com.au)  
[www.orford.com.au](http://www.orford.com.au)



✉ 382 South Street  
Harristown  
Queensland 4350  
Australia

**Features**



- World Class Design
- World Class Energy Efficiency
- World Class Performance, Quality & Reliability
- Universal Refrigeration Package
- One package fits the entire EB Range
- Cassette Style : Removable without tools
- Minimal training required for non-qualified personal to replace the package

**Features**

- Independent light switch via switch or via controller
- Condenser Filter—Easy access to filter with NO tools or covers to remove
- Carel Ezy Controller



**High Energy Efficiency**

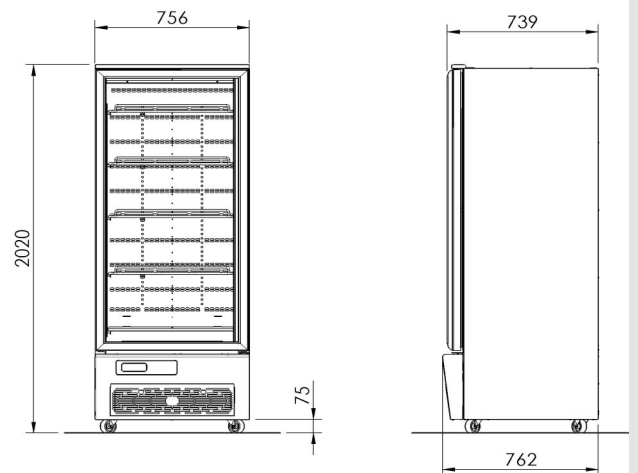

\* Energy Consumption measured at 25°C. Cabinet Class 3M1 as per Australian Standard AS1731

EB20R Specifications	Vertical Display Refrigerator
Construction	Powder Coated galvanized steel Interior / Exterior White
Capacity	595 Litres (Gross)
Dimensions	756W x 762D x 2020H
Weight	155Kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 40° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	2.8 Amps
Thermometer	Digital—Carel Ezy
Shelves	4 Height Adjustable Heavy Duty PVC Coated
Shelves	1 Fixed Stainless Steel Base Shelves
Shelf Adjustment	12mm Increments
Refrigerated Shelf Area	1.42 m <sup>2</sup>
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas
Door	1 x Self Closing, Double Glazed Safety Glass, Double Heat reflective Low E, Warm edge, R/H
Footings	Heavy Duty Castors, Lockable Front
Interior Light	LED, Automatic and manual control
Refrigerant	R134a
Drier	Solid Core
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free
Cabinet Classes	3M1, 4M1, 5M1
MEPS	Compliant (High Efficiency)
* Energy Consumption	3.17 kWh/24h
Condenser Filter	Easy front access
Illuminated Advertising Sign	200mm High, Top Mounted
Sign Illumination	LED, Automatic and manual control

