


All Purpose Display & Storage Refrigerator—GDM1000-HG-B

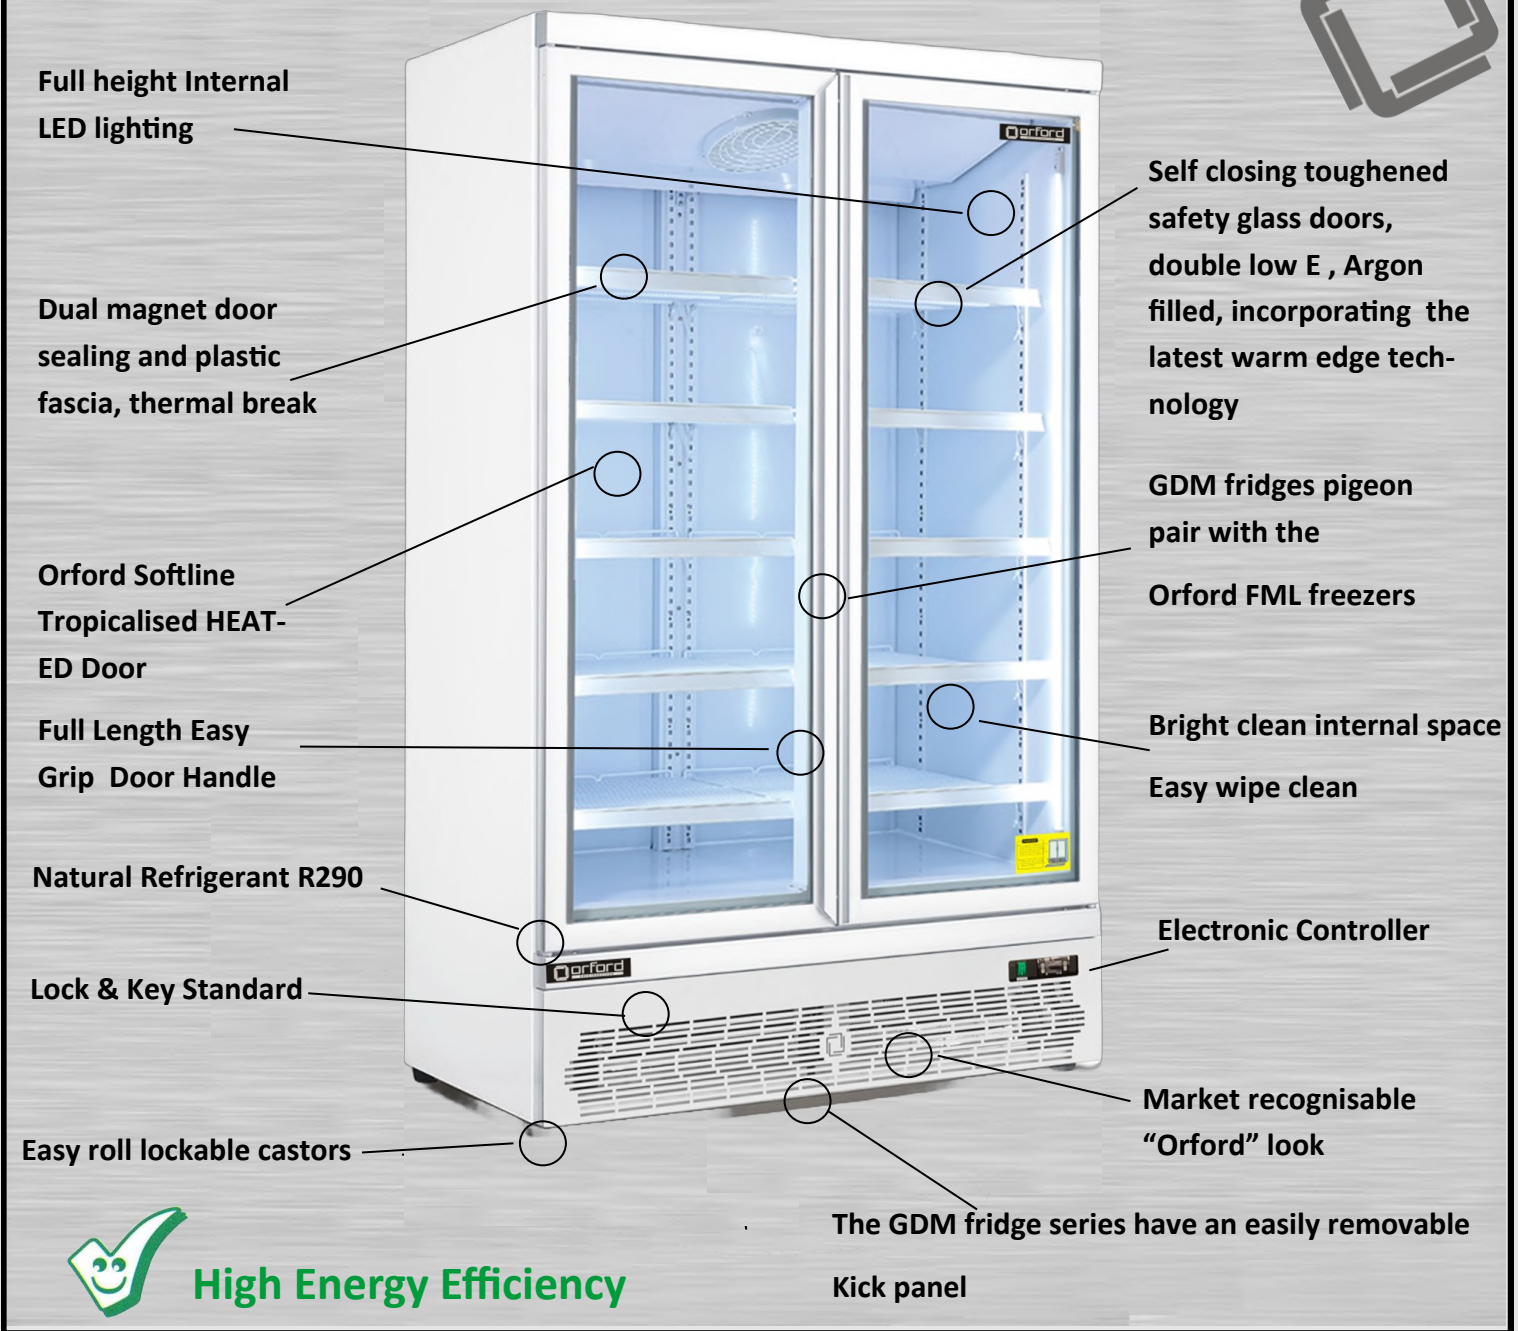

Full height Internal LED lighting

Dual magnet door sealing and plastic fascia, thermal break

Orford Softline Tropicalised HEATED Door

Full Length Easy Grip Door Handle

Natural Refrigerant R290

Lock & Key Standard

Easy roll lockable castors

Self closing toughened safety glass doors, double low E , Argon filled, incorporating the latest warm edge technology

GDM fridges pigeon pair with the Orford FML freezers

**Bright clean internal space
Easy wipe clean**

Electronic Controller

Market recognisable "Orford" look

The GDM fridge series have an easily removable Kick panel

High Energy Efficiency



Orford Fridge GDM1000 2 Door Vertical Display Refrigerator

Specifications

Construction	Powder Coated galvanized steel Interior /Exterior White
GDM1000	2 DOOR REFRIGERATOR
Capacity	1081 Litres (gross)
Dimensions	1253 w x 710 D + 30 mm stopper x 2039 H (mm)
Weight	179 kg (net)
Doors	2 x Self Closing, Triple Glazed Heated Safety Glass, Argon filled with Double Heat reflective Low E,
Temp	1° — 5°
Ambient Temperature	32 degrees
Power Point	1 x 10 AMP plug
* Energy Consumption	5.1 kWh/24h/m2
Common Specifications	GDM650 / 1000 / 1600
Compressor	Donper K480DU RoHS compliant
Thermometer	Digital Carel Ezy Controller
Shelves per door	5 Height Adjustable Heavy Duty PVC Coated
Shelf Adjustment	12mm Increments
Shelf size	565 mm W x 490 mm D
Footings	4 x Heavy Duty 70 mm Castors, Lockable Front
Interior Light	LED light
Refrigerant	R290a
Drier	Solid Core
Insulation	60mm Polyurethane, CFC, HCFC, HFC Free
Cabinet Classes	
Condenser Filter	Easy front access
Door	Orford Softline doors
	Lock and Key standard on all models
Condensation Management	Tropicalised Heated Glass Door
Kick Panel	Easy unclip and remove system
Defrost	Auto Defrost
Compliance	MEPS, EMC,

