


All Purpose Display & Storage Refrigerator—GDM1600

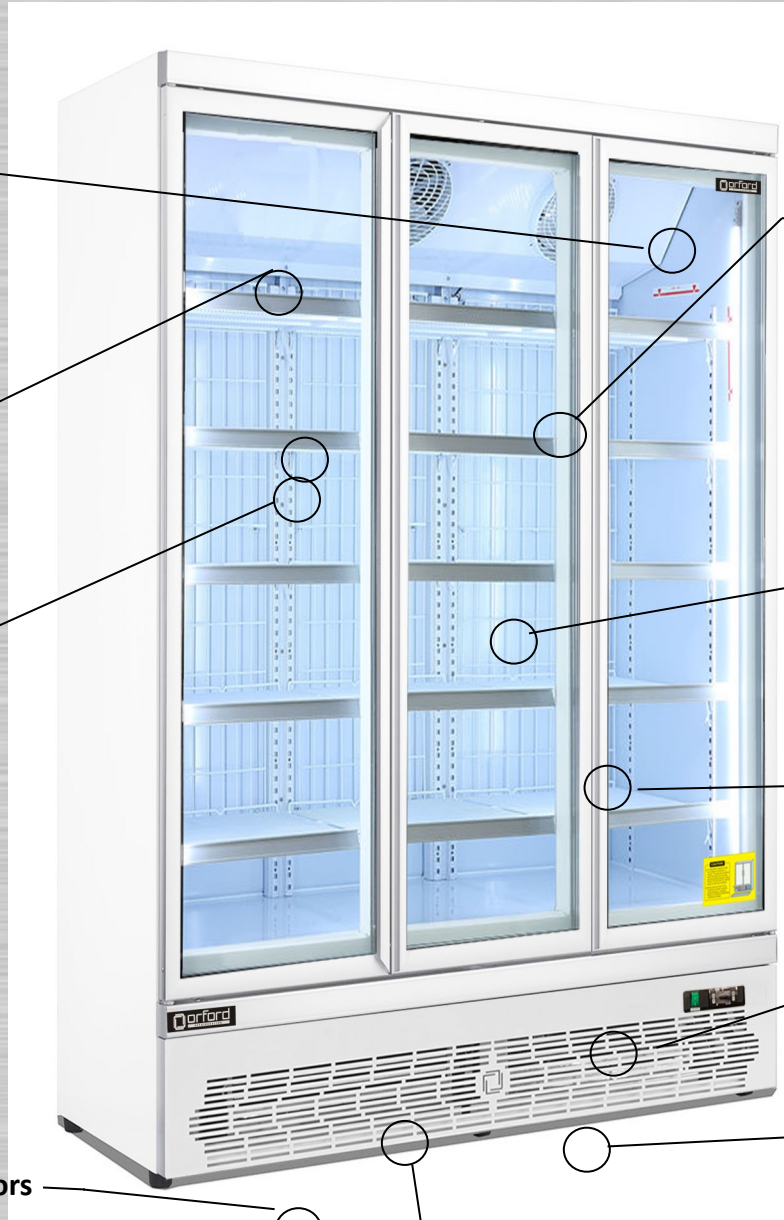

Full height Internal LED lighting

Dual magnet door sealing and plastic fascia, thermal break

Orford Softline Door

Full Length Easy Grip Door Handle

Easy roll lockable castors

Self closing toughened safety glass doors, double low E , Argon filled, incorporating the latest warm edge technology

Orford GDM Fridges match the Orford FML Freezers

Bright clean internal space
Easy wipe clean

Electronic Controller

Market recognisable "Orford" look

The GDM fridge series have an easily removable Kick panel



High Energy Efficiency





Orford Fridge GDM1600	
3 Door Vertical Display Refrigerator	
Specifications	
Construction	Powder Coated galvanized steel Interior /Exterior White
GDM1000	3 DOOR REFRIGERATOR
Capacity	1664 Litres (gross)
Dimensions	1880 w x 710 D + 30mm stopper x 2039 H (mm)
Weight	207 kg (net)
Doors	3 x Self Closing, Triple Glazed Safety Glass, Argon filled with Double Heat reflective Low E, 0° — 10°
Temp	32 degrees
Ambient Temperature	1 x 15 AMP plug
Power Point	9.6 kWh/24h/m2
* Energy Consumption	GDM1000 / 1600
Common Specifications	
Compressor	Donper K480DU RoHS Compliant
Thermometer	Digital Carel Ezy Controller
Shelves per door	5 Height Adjustable Heavy Duty PVC Coated
Shelf Adjustment	12mm Increments
Shelf size	565 mm W x 490 mm D
Footings	Heavy Duty 2.5mm Castors, Lockable Front
Interior Light	LED light
Refrigerant	R290a
Drier	Solid Core
Insulation	60mm Polyurethane, CFC, HCFC, HFC Free
Cabinet Classes	
Condenser Filter	Easy front access
Door	Orford Softline doors
Kick Panel	Easy unclip and remove system
Defrost	Auto Defrost
Compliance	MEPS, EMC, RoHS

