


technology that works

Orford VB36L-Sn-A

All Purpose Display & Storage Freezer

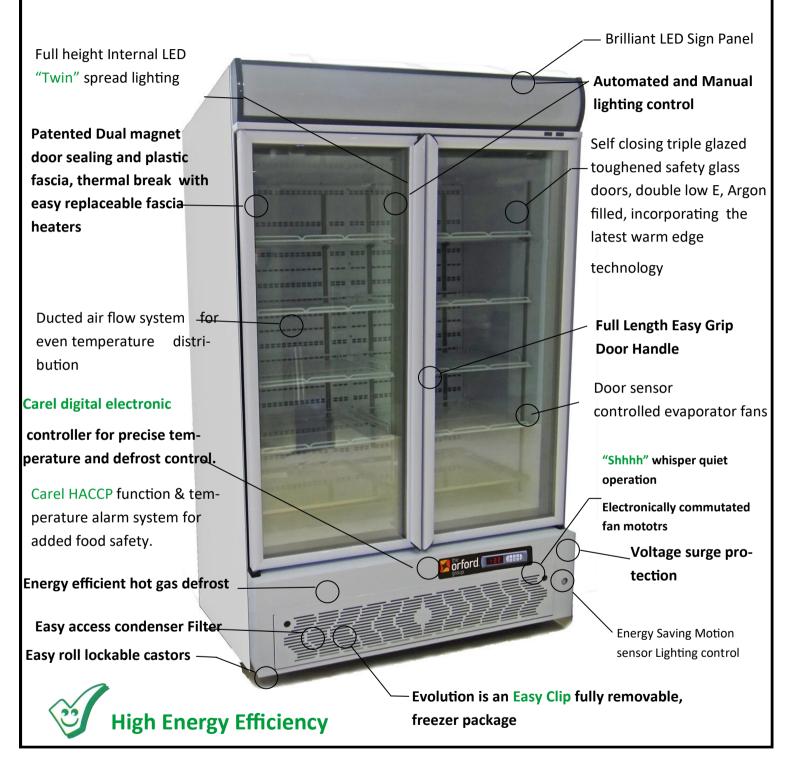

Proudly Australian Designed

by The Orford Group

IP protected by AUS DSN no 345317

With Evolution comes much responsibility. The Orford Group continues to develop World Class Energy reduction systems to improve the lives of our customers and future generations.



0418 700 006





Orford VB36L-Sn-A

Large Two Door Vertical Display Freezer

Features

- World Class Design > Energy Efficiency Performance
- Reliability Quality Surge Protection
- Removable signbox

Removable Freezer Package

- > Cassette Style: Removable without tools
- > Minimal training required for non-qualified personal to replace the package
- > Ambient air intake from the front, Hot condenser discharge air exits through rear

Compliance

> Electrical Compliance to Australian Standard AS / ANZ 60335.2.89 including Amdt 1:2013 for electrical safety

V B36L-Sn-A	Vertical Display Freezer
Specifications	with Illuminated Advertising Sign
Construction	Powder Coated galvanized steel Interior /Exterior White
Capacity	1071 Litres (Gross)
Dimensions	1286W x 866D (+82 overhang = 952mm total) x 2215H (mm)
Weight	250 Kg (net)
Operating Temp	-19° to -23° C.
Ambient Temp Range	0° - 40° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	6.3 Amps
Thermometer	Digital
Shelves	8 Height Adjustable Heavy Duty PVC Coated
Shelves	2 Fixed Stainless Steel Base Shelves
Shelf Adjustment	12mm Increments
Refrigerated Shelf Area	2.62 m²
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas
Full Handled Door	2 x Self Closing, Triple Glazed Safety Glass, Argon filled with Double Heat reflective Low E, Warm edge with removable torsion bar, heated frame
Footings	Heavy Duty Castors, Lockable Front
Interior Light	LED, Automatic and manual control
Refrigerant	R404a
Drier	Solid Core
Insulation	60mm Polyurethane, CFC, HCFC, HFC Free
Cabinet Classes	3L1, 4L2, 5L3 up to 40 degree Celsius ambient
MEPS	Compliant (High Efficiency)
* Energy Consumption	20.73 kWh/24h/m2
Condenser Filter	Easy front access
Illuminated Advertising Sign	205mm High, Top Mounted
Sign Illumination	LED, Automatic (motion sensor control) and manual control
Temperature Alarms	High and low temperature alarms
HACCP Function	Alarm system
Defrost	Energy Efficient Hot Gas
Sign Illumination	LED, Automatic and manual control

Motion Sensing Lighting Control

> Automatically switches lighting on as customers approach



Automates your energy savings

Lighting Control

- Automated or manual control, you choose
- Independent switching of interior and sign lighting

LED light tubes

> Replaceable by non-qualified personal. (Extra low voltage 24V DC)


Condenser Filter

> Easy Access Filter : No tools, no covers to remove


Patent Protected Design by Orford Refrigeration







With Evolution comes much responsibility. Orford continues to develop World Class Energy reduction systo improve the lives of our customers and future

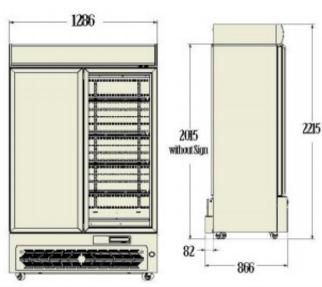

* Energy Consumption measured at 25°C. Cabinet Class 3L1 as per Australian Standard AS1731





