


All Purpose Display & Storage Freezer

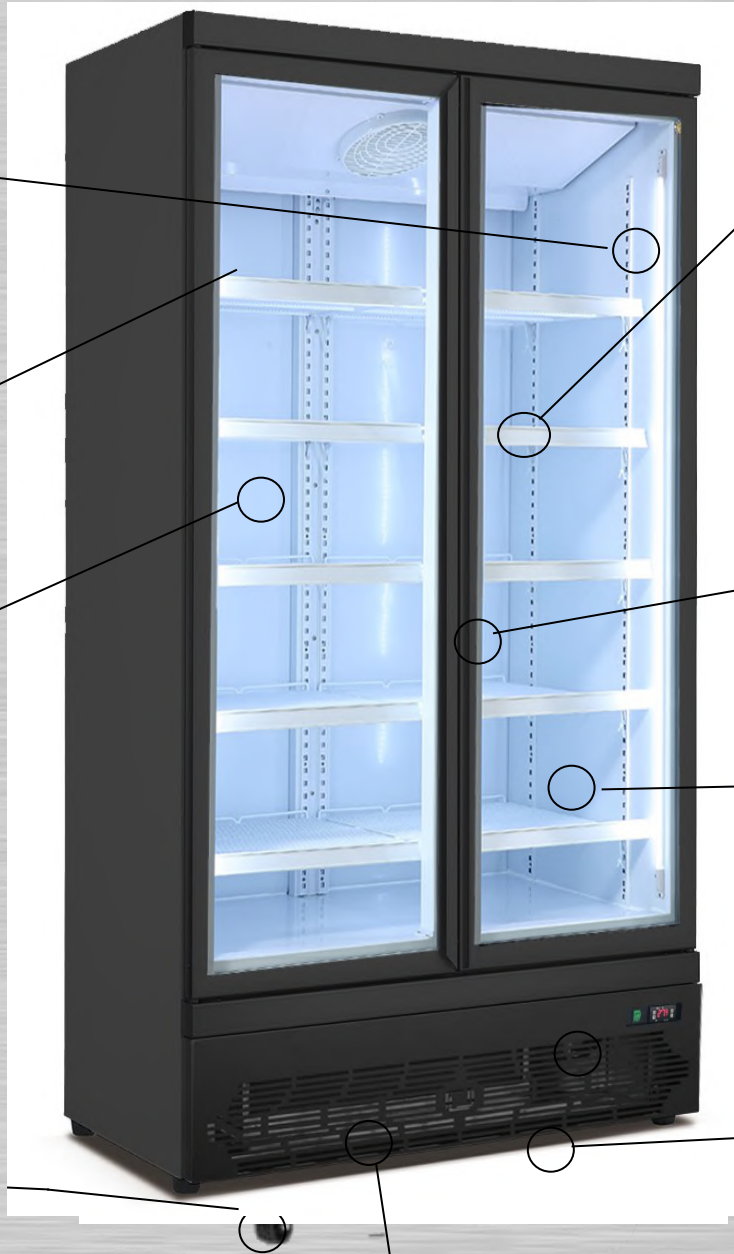

Full height Internal LED lighting

Dual magnet door sealing and plastic fascia, thermal break

Orford Softline Door

Full Length Easy Grip Door Handle

Easy roll lockable castors

Self closing toughened safety glass doors, double low E, Argon filled, incorporating the latest warm edge technology

Ducted air flow system for even temperature distribution

Bright clean internal space
Easy wipe clean

Market recognisable "Orford" look



High Energy Efficiency

The FML freezer series have an easily removable





Orford FML freezer Series

Orford Freezer FML30 Specifications	2 Door Vertical Display Freezer
Construction	Powder Coated galvanized steel Interior /Exterior White
FML-30	2 DOOR FREEZER
Capacity	930 Litres (gross)
Dimensions	1253 w x 760 D x 2039 H (mm) (B Model onwards)
Weight	240 kg (net)
Doors	2 x Self Closing, Triple Glazed Safety Glass, Argon filled with Double Heat reflective Low E,
Temp	-18--22c degrees
Ambient Temperature	32 degrees
Power Point	1 x 15 AMP plug
* Energy Consumption	22.4 kWh/24h/m2
Common FML Specifications	FML20 / FML30 / FML50
Compressor	Danfoss
Thermometer	Digital Elitech Controller
Shelves per door	4 Height Adjustable Heavy Duty PVC Coated
Shelf Adjustment	12mm Increments
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas
Footings	Heavy Duty 2.5mm Castors, Lockable Front
Interior Light	LED light
Refrigerant	R290a—Natural Refrigerant (B Model onwards)
Drier	Solid Core
Insulation	60mm Polyurethane, CFC, HCFC, HFC Free
Cabinet Classes	
Condenser Filter	Easy front access
Door	Orford Softline doors
Drip Tray Evaporation Method	Hot Gas
Kick Panel	Easy unclip and remove system
Defrost	Energy Efficient Hot Gas
Compliance	MEPS, EMC,

