


All Purpose Display & Storage Refrigerator

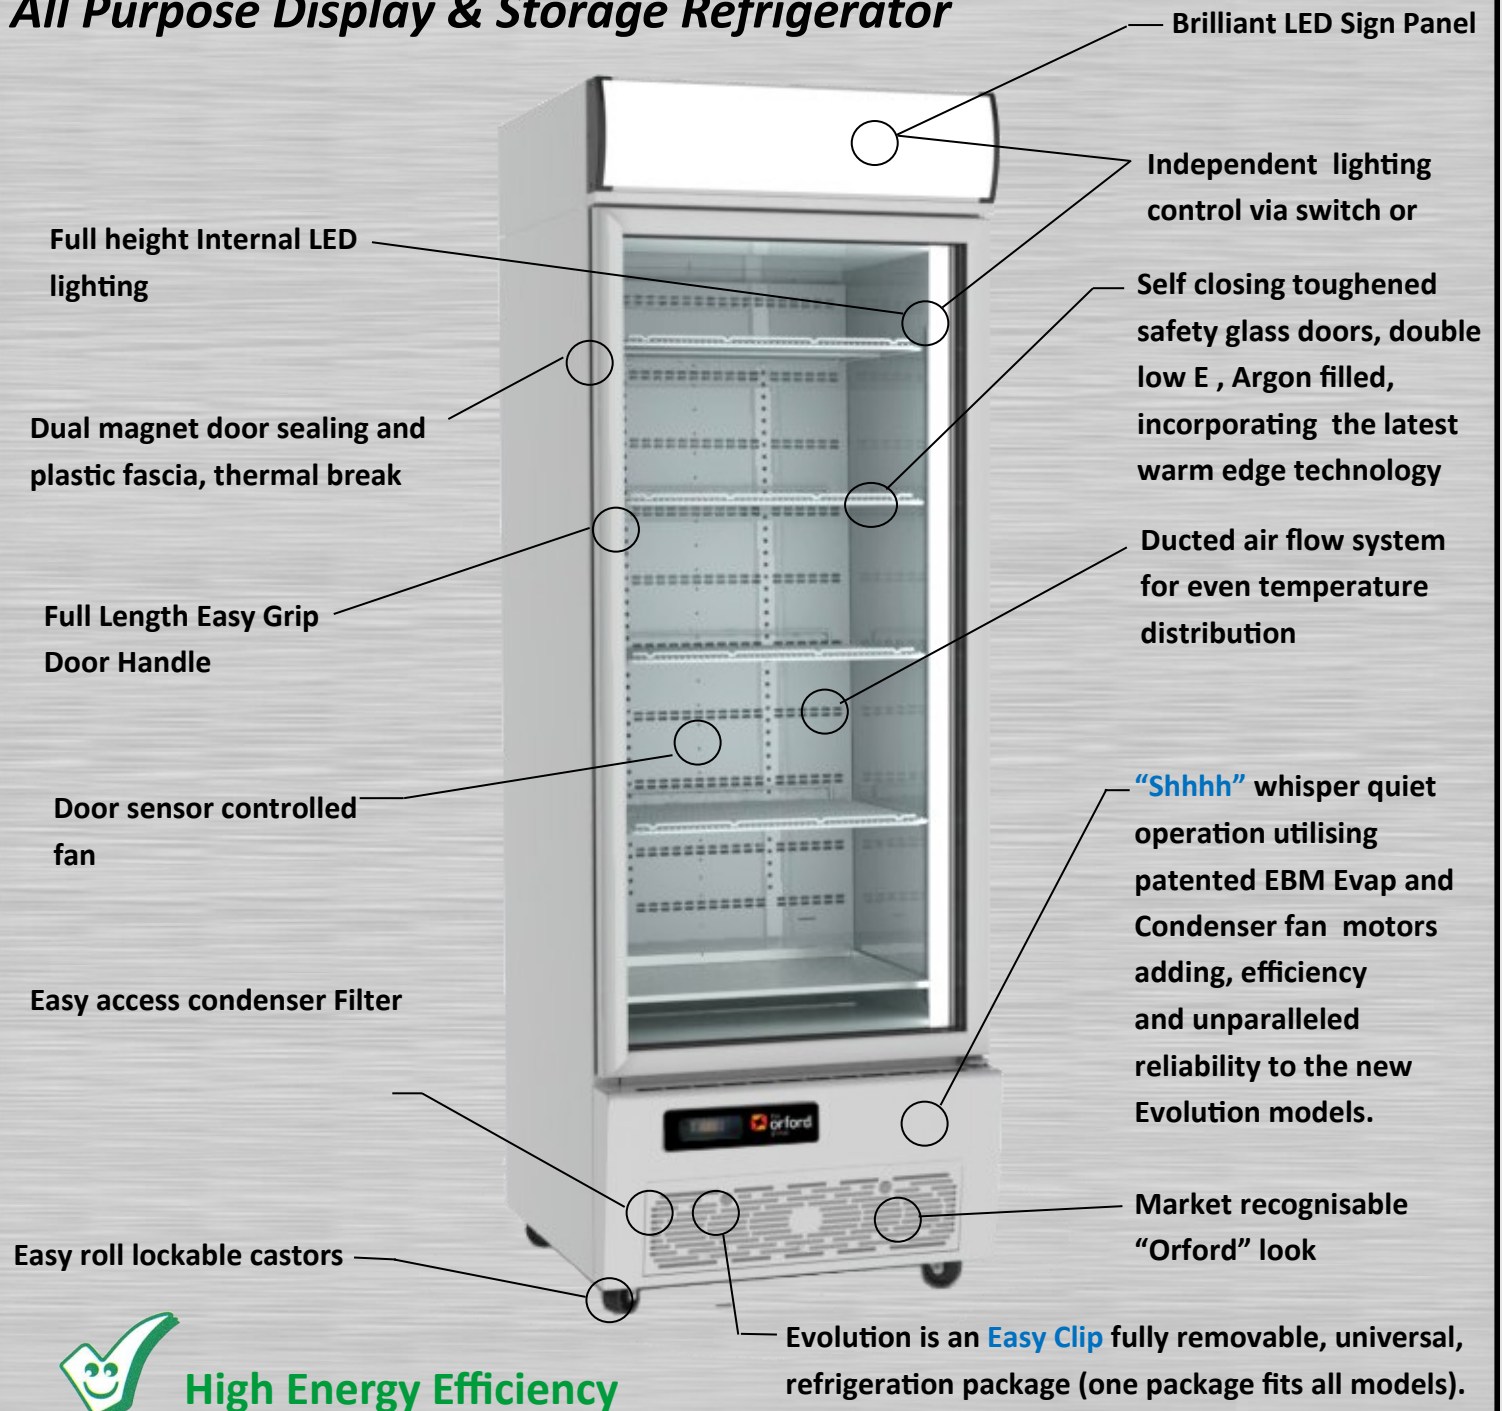

High Energy Efficiency

Proudly Australian Designed

by Orford Refrigeration

IP protected by AUS DSN no 345317



Orford Refrigeration continues to develop World Class Energy reduction systems to improve the lives of our customers and future generations.





Features

- World Class Design
- World Class Energy Efficiency
- World Class Performance, Quality & Reliability
- Universal Refrigeration Package
- One package fits the entire EB Range
- Cassette Style : Removable without tools
- Minimal training required for non-qualified personal to replace the package

Features


- Independent light switch via switch or via controller
- Condenser Filter—Easy access to filter with NO tools or covers to remove
- Carel Ezy Controller



High Energy Efficiency



<i>EB20R-Sn</i>	Vertical Display Refrigerator with Illuminated Advertising Sign
Specifications	
Construction	Powder Coated galvanized steel Interior / Exterior White
Capacity	595 Litres (Gross)
Dimensions	756W x 762D x 2220H
Weight	155Kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 40° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	2.8 Amps
Thermometer	Digital—Carel Ezy
Shelves	4 Height Adjustable Heavy Duty PVC Coated
Shelves	1 Fixed Stainless Steel Base Shelves
Shelf Adjustment	12mm Increments
Refrigerated Shelf Area	1.42 m ²
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas
Door	1 x Self Closing, Double Glazed Safety Glass, Double Heat reflective Low E, Warm edge, R/H
Footings	Heavy Duty Castors, Lockable Front
Interior Light	LED, Independent light switches
Refrigerant	R134a
Drier	Solid Core
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free
Cabinet Classes	3M1, 4M1, 5M1
MEPS	Compliant (High Efficiency)
* Energy Consumption	3.43 kWh/24h
Condenser Filter	Easy front access
Illuminated Advertising Sign	200mm High, Top Mounted
Sign Illumination	LED, Automatic and manual control

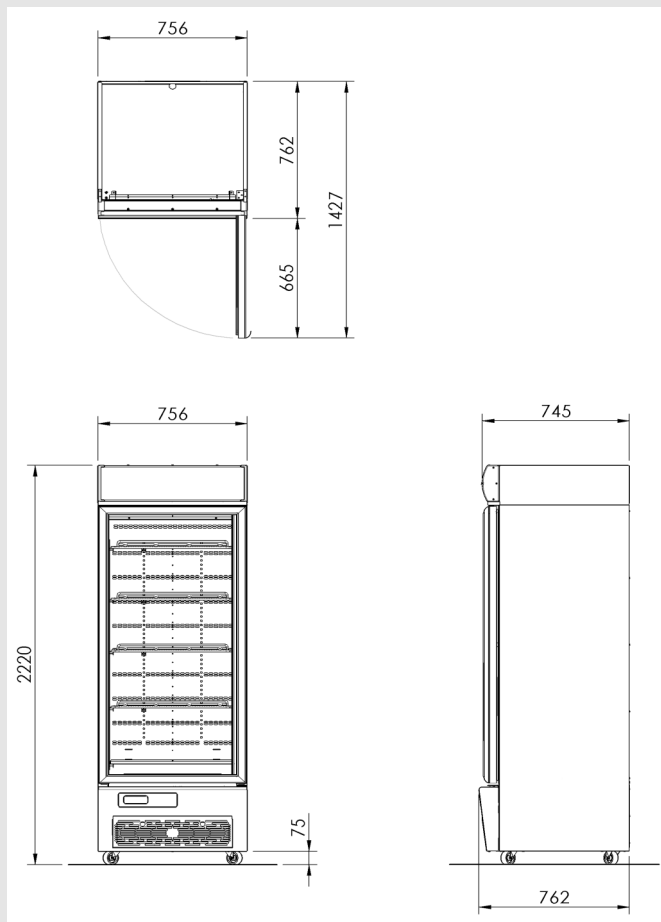

* Energy Consumption measured at 25°C. Cabinet Class 3M1 as per Australian Standard AS1731

