


**All Purpose Display & Storage Refrigerator**

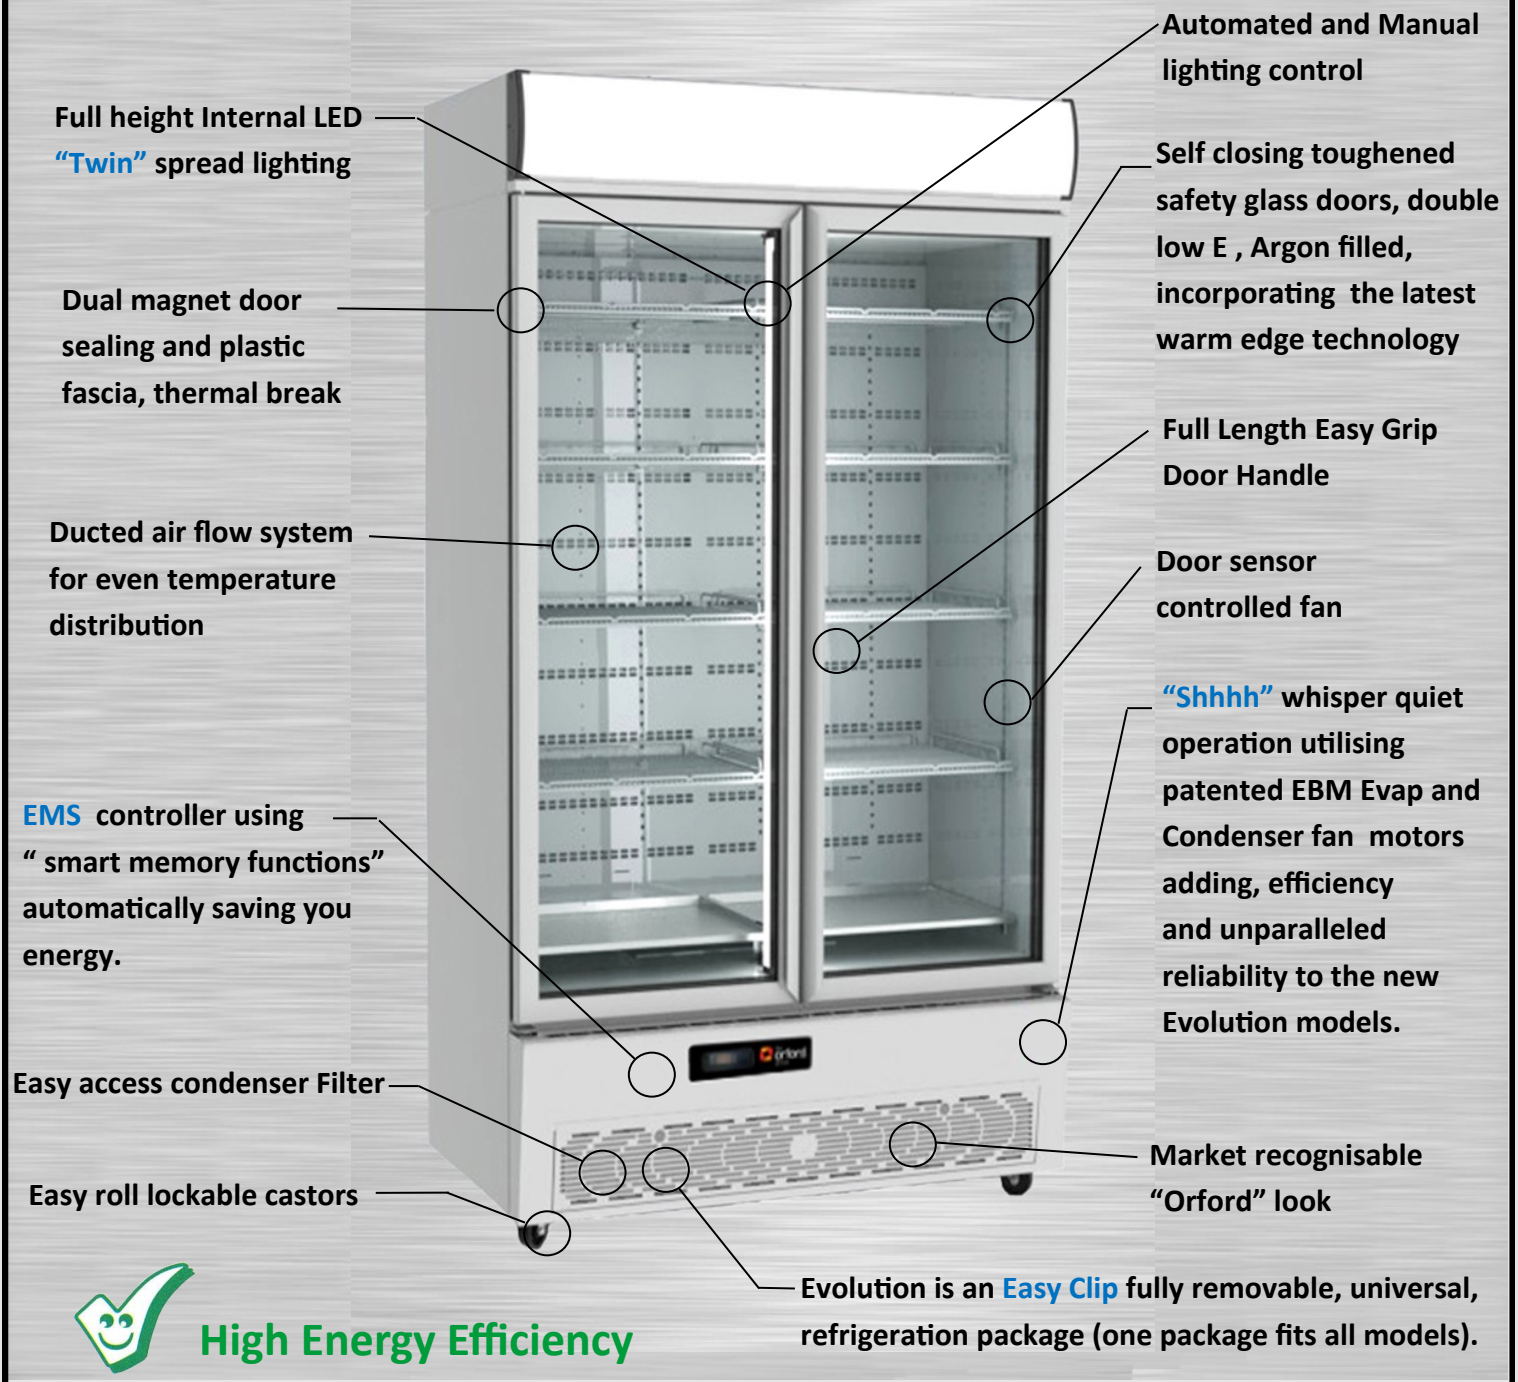

**Full height Internal LED “Twin” spread lighting**

**Dual magnet door sealing and plastic fascia, thermal break**

**Ducted air flow system for even temperature distribution**

**EMS controller using “smart memory functions” automatically saving you energy.**

**Easy access condenser Filter**

**Easy roll lockable castors**

**Automated and Manual lighting control**

**Self closing toughened safety glass doors, double low E , Argon filled, incorporating the latest warm edge technology**

**Full Length Easy Grip Door Handle**

**Door sensor controlled fan**

**“Shhhh” whisper quiet operation utilising patented EBM Evap and Condenser fan motors adding, efficiency and unparalleled reliability to the new Evolution models.**

**Market recognisable “Orford” look**

**Evolution is an Easy Clip fully removable, universal, refrigeration package (one package fits all models).**

**High Energy Efficiency**

**Proudly Australian Designed**

**by The Orford Group**



*With Evolution comes much responsibility. The Orford Group continues to develop World Class Energy reduction systems to improve the lives of our customers and future generations.*



**Features**

**World class,**

- Design
- Energy Efficiency
- Performance
- Quality
- Reliability

**Universal Refrigeration Package**

- One package fits the entire **EB** Range
- Cassette Style: Removable without tools
- Minimal training required for non-qualified personal to replace the package

**Energy Management System (EMS)**

- Automatically learns your trading times
- Automates your energy savings
- Perishable and non-perishable mode

**Lighting Control**

- Automated or manual control, you choose
- Independent switching of interior and sign lighting

**Condenser Fan Function**

- Your choice of reversing or non-reversing function


**Condenser Filter**

- Easy Access filter: No tools, no covers to remove



**High Energy Efficiency**

<b>EB30R</b>	<b>Vertical Display Refrigerator with Illuminated Advertising Sign</b>
<b>Specifications</b>	
Construction	Powder Coated galvanized steel Interior / Exterior White
Capacity	895 Litres (Gross)
Dimensions	1094W x 762D x 2220H
Weight	210Kg
Operating Temp	0° - 5° C.
Ambient Temp Range	0° - 40° C.
Power Point	220 - 240v 50Hz. (Standard GPO)
Input Current	2.8 Amps
Thermometer	Digital
Shelves	8 Height Adjustable Heavy Duty PVC Coated
Shelves	2 Fixed Stainless Steel Base Shelves
Shelf Adjustment	12mm Increments
Refrigerated Shelf Area	2.17 m <sup>2</sup>
Condensate Disposal	Automatic by energy efficient, No Cost, Hot Gas
Door	2 x Self Closing, Double Glazed Safety Glass, Double Heat reflective Low E, Warm edge
Footings	Heavy Duty Castors, Lockable Front
Interior Light	LED Automatic and manual control
Refrigerant	R134a
Drier	Solid Core
Insulation	50mm Polyurethane, CFC, HCFC, HFC Free
Cabinet Classes	3M1, 4M1, 5M1
MEPS	Compliant (High Efficiency)
* Energy Consumption	4.24 kWh/24h
Condenser Filter	Easy front access

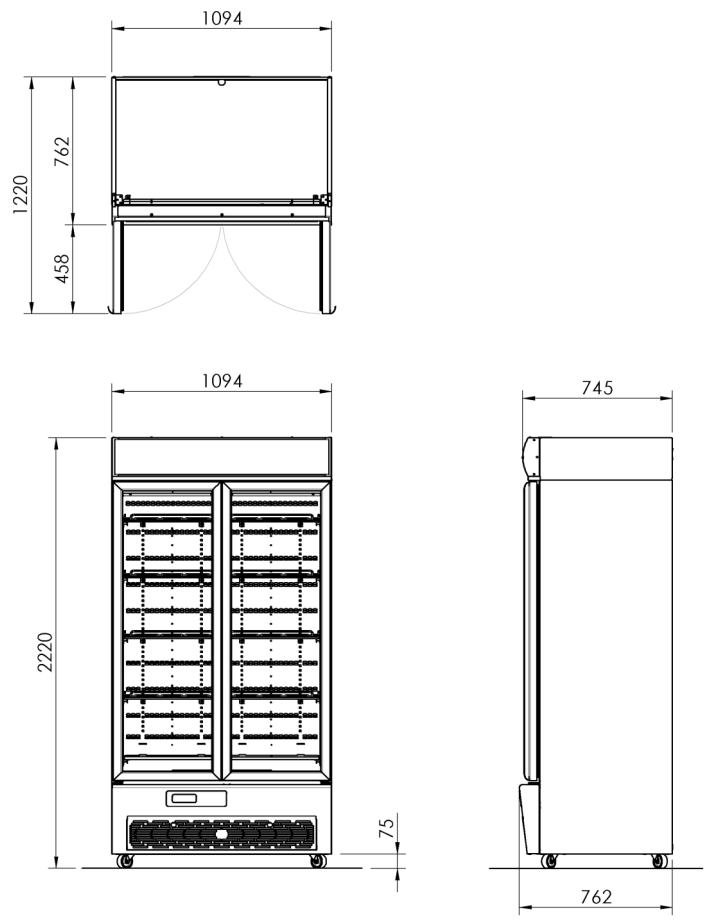

\* Energy Consumption measured at 25°C. Cabinet Class 3M1 as per Australian Standard AS1731

